


SF-50



Code: SF-50P.V.C. 150 PSI RANGE (Open End)

BRICK RED DISCHARGE HOSE

Text Size:

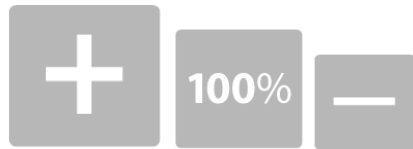

- STND LENGTH:** 300 ft. per bale (Special order for longer lengths)
- TEMP. RANGE:** -5° to 170° F. When Temperature is -15°C and Colder, please DO NOT Handle or Transport Hoses.
- APPLICATIONS:** Mines, Construction, etc.
- CONSTRUCTION:** 3-Ply Polyester Yarns. Both tube and cover are extruded simultaneously to obtain maximum bonding.
- FLAME RESISTANT:** USMSHA IC-150/1 (Size 1-1/2", 2", 2-1/2")
Special Order Only.
- CAUTION:** For liability purposes, if temperature exceeds 110° F the working pressure will go down. Please check with factory to ensure sufficient safety factor.

NORMAL SIZE	I.D	APPROX. WALL	MAX. W.P. at 70°F psi	DESIGN B.P. psi	APPROX. Wt. 300ft (USA)	APPROX. Wt. 300ft (JAPAN)
1-1/2"	1.61"	0.079"	150 psi	450	80 lbs.	64 lbs
2"	2.09"	0.087"	150 psi	450	103 lbs	85 lbs
2-1/2"	2.56"	0.091"	150 psi	450	124 lbs	119 lbs
3"	3.07"	0.095"	150 psi	450	164 lbs	158 lbs
4"	4.13"	0.102"	150 psi	450	254 lbs	225 lbs
6"	6.18"	0.119"	150 psi	450	400lbs	375 lbs
8"	8.19"	0.134"	115 psi	350		566 lbs

